



UHF 8th Order Dual Mode Reflective DTV/DVB-T Mask Filter

Micro Communications, Inc.


- **Thermally Adjusted**
- **DTV Mask Compliant**
- **3-1/8 EIA In and Out
Other Connectors Available**
- **Thermally Stable Invar
Available upon request**

Electrical Specifications

Filter Type	Band Pass Dual Mode
Order	8th
Frequency Range	470- 862 MHz
Impedance	50 Ohm
Maximum RMS Power	20kW(30kw Max- 4-1/16EIA)
Connectors	3-1/8 EIA(Male)
Channel Bandwidth	6 MHz (8MHz Optional)
VSWR	1.08:1
Insertion Loss	@ $f_c = .35\text{dB}$
Frequency Response	6MHz Pass Band
$f_c \pm 3.5$ MHz	$\leq 6.0\text{dB}$
$f_c \pm 4.0$ MHz	$\leq 12.0\text{dB}$
$f_c \pm 4.5$ MHz	$\leq 23.0\text{dB}$
$f_c \pm 5.0$ MHz	$\leq 27.0\text{dB}$
$f_c \pm 6.0$ MHz	$\leq 37.0\text{dB}$
$f_c \pm 9.0$ MHz	$\leq 65.0\text{dB}$
Group Delay Variation	≤ 350 ns
Normal Operating Temp.	Ambient to 150°F (65°C)

Mechanical & Environmental Specifications

Dimensions -Typical @CH 33	16.5"Ø x 60" LG	
Materials	Outer Conductor	6061 Aluminum
	Finishing	Long Lasting Black Paint
	Hardware	Stainless Steel
Temperature Range	-10° to +50°C	

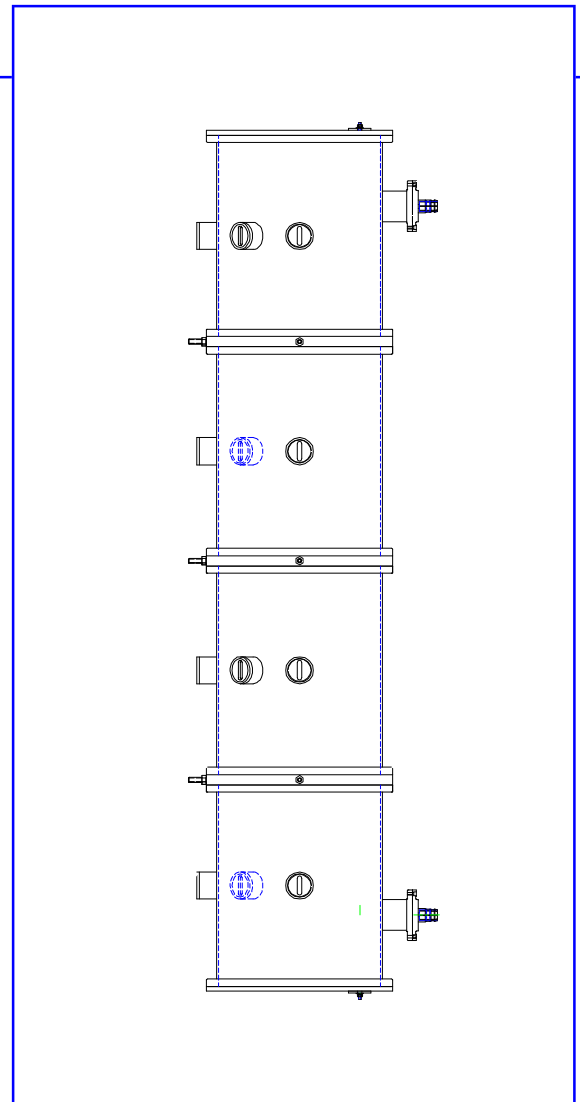

Micro Communications, Inc.

Micro Communications, Inc - A Mega Industries Company
 28 Sanford Dr. Gorham Maine 04038 Phone: 207.854.1700 Fax: 207.854.2287
 Email: sales@megaind.com Web: www.megaind.com