



UHF COMPACT DIPLEXER

Micro Communications, Inc.



- Ideal for Solid State Transmitter
- Low Loss
- Low VSWR
- Compatible with CCIR Dual Sound
- High Isolation

MCI UHF Compact Diplexers are constant impedance devices used to combine visual and aural signals into a single output. These diplexers are constructed of broadband coax hybrids and high Q cavity sections in a unitized frame for floor or ceiling mounting.

The aural cavities are constructed of Invar™, an ultra-thermally stable metal, and are silver-plated to guarantee low loss for combining. These high quality materials result in a very efficient, reliable and stable diplexer, especially for CCIR dual sound requirements.

These diplexers satisfy FCC and CCIR bandwidth requirements and have minimum pass band variation and group delay.

Models are available for UHF channels 14-69. Power Levels from 2 to 60kW peak visual are available.

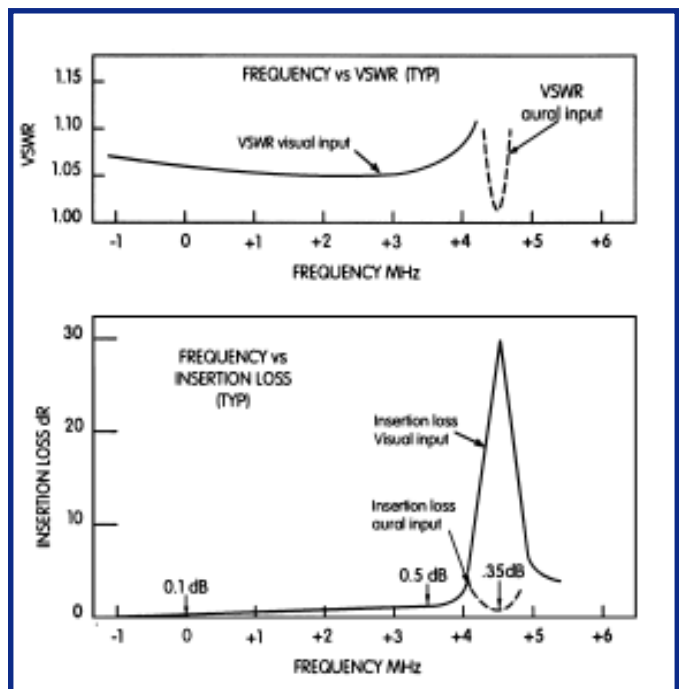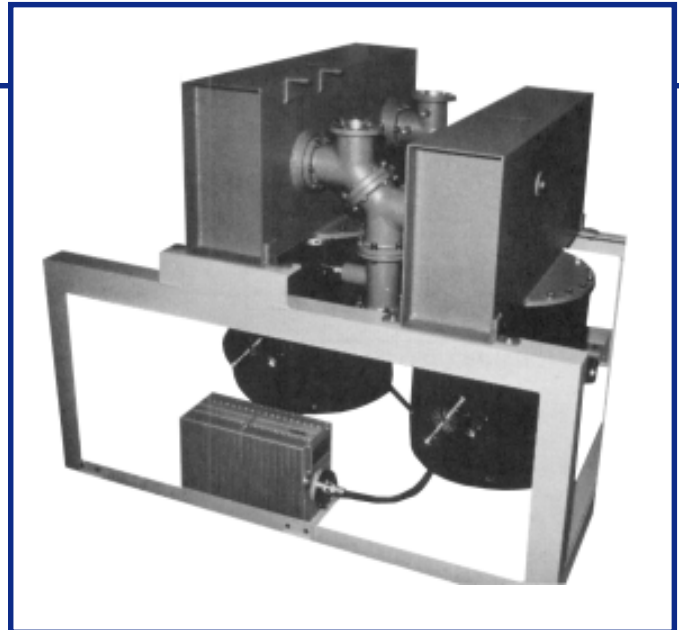



Micro Communications, Inc.

**SERIES 41400
UHF COMPACT DIPLEXER**

SPECIFICATIONS	
VSWR:	1.08 (Visual Frequency) 1.10 (Aural Frequency)
Insertion Loss:	0.1 dB (Visual Frequency) 0.4 dB (Aural Frequency)
Isolation:	35 dB (Visual – Aural) 30 dB (Aural – Visual)

		UHF		
FREQUENCY (MHz)		470-488	488-728	728-860
CHANNEL RANGE		14-16	17-56	57-69
MODEL		41436	41446	41456
POWER		60kW	60kW	60kW
SIZE	in	68x54x54	66x52x52	64x50x50
	(cm)	(172.7x137x137)	(167x132x132)	(162x127x127)
WEIGHT	lbs	280	270	250
	(kg)	(127)	(122)	(113)
CONNECTORS EIA		6 1/8	6 1/8	6 1/8
MODEL		41435	41445	41455
POWER		40kW	40kW	40kW
SIZE	in	54x46x46	52x44x44	50x42x42
	(cm)	(137x117x117)	(132x112x112)	(127x107x107)
WEIGHT	lbs	210	200	180
	(kg)	(95)	(90)	(81)
CONNECTORS EIA		4 1/16	4 1/16	4 1/16
MODEL		41434	41444	41454
POWER		20kW	20kW	20kW
SIZE	in	54x46x46	52x44x44	50x42x42
	(cm)	(137x117x117)	(132x112x112)	(127x107x107)
WEIGHT	lbs	190	180	160
	(kg)	(86)	(81)	(73)
CONNECTORS EIA		3 1/8	3 1/8	3 1/8
MODEL		41433	41443	41453
POWER		10kW	10kW	10kW
SIZE	in	54x46x46	52x44x44	50x42x42
	(cm)	(137x117x117)	(132x112x112)	(127x107x107)
WEIGHT	lbs	190	180	160
	(kg)	(86)	(81)	(73)
CONNECTORS EIA		3 1/8	3 1/8	3 1/8

All specifications subject to change without notice.

NOTES:

1. Aural power is 10% of visual power. Please contact the factory for applications requiring 20% aural.
2. Forced air cooling for aural cavities can be supplied for 20, 40, and 60kW models.
3. Visual color notch trap maybe added.
4. 10kW design also used for 5kW and 2kW models



Micro Communications, Inc.

Micro Communications, Inc - A Mega Industries Company

28 Sanford Dr. Gorham Maine 04038 Phone: 207.854.1700 Fax: 207.854.2287

Email: sales@megaind.com Web: www.megaind.com