



Micro Communications, Inc.

Band III 2 Dipoles Panel

Especially Suitable For Square Masts

Model: AT13-220



made by RYMSA

Electrical Specifications

Frequency range	174-230 MHz		
Peak gain	7.5 dB (ref. $\lambda/2$ dipole)		
3 dB beam width	E-plane: 69°	H-plane: 59°	
Polarization	Horizontal		
Impedance	50 Ohm		
VSWR	$\leq 1.15:1$		
Maximum power handling peak sync	2 KW	3.5 KW	6 KW
Maximum power handling RMS	1.4 KW	2.5 KW	4.2 KW
Connector type	DIN 7/16	EIA 7/8"	DIN 13/30
Pressurization	Non pressurized	Gas barrier on input connector	





Mechanical & Environmental Specifications

Materials	Reflector & dipoles Feed points radome	Hot dip galvanized steel Fiberglass
Dimensions (W x D x H)	1250 x 500 x 1300 mm	
Maximum wind speed	200 Km/h	
Wind load (front)	793 N (@160 Km/h)	
Wind load (lateral)	392 N (@160 Km/h)	
Weight	38 Kg	
Typical mounting	Square arrangement tower	
Clamp type	To \varnothing 80 – 115 mm pipe	
Vertical spacing	1600 mm	
Grounding	DC grounded	
Temperature range	-40°C to +80°C	
Humidity	100%	

Antenna System Characteristics

Number of Bays	Number ant. per bay	Peak gain (dBd)	Weight (Kg)	Wind load (@160 Km/h)	System height (mm)
1	2	5.5	76	1.2 KN	1300
	3	3.7	114	1.6 KN	
	4	2.5	152	2.0 KN	
2	2	8.5	152	2.4 KN	2900
	3	6.7	228	3.2 KN	
	4	5.5	304	3.9 KN	
4	2	11.5	304	4.7 KN	6100
	3	9.7	456	6.3 KN	
	4	8.5	608	7.9 KN	
6	2	13.3	456	7.1 KN	9300
	3	11.5	684	9.5 KN	
	4	10.3	912	11.8 KN	
8	2	14.5	608	9.5 KN	12500
	3	12.7	912	12.6 KN	
	4	11.5	1216	15.8 KN	

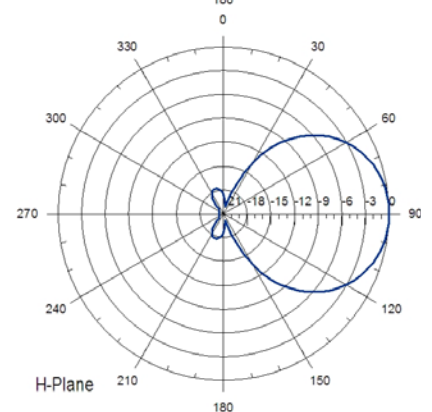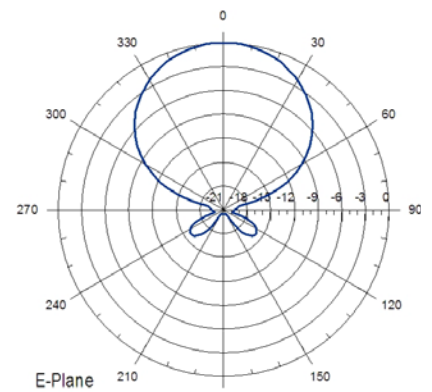

NOTES:
 - Table supplies data up to 8 bays only for simplification purposes; systems with more bays are available.
 - Null fill, beam tilt, harness & feeder losses NOT INCLUDED.
 - Wind load & weight figures without considering cables, splitters & hardware



Micro Communications, Inc.

Micro Communications, Inc - A Mega Industries Company
 28 Sanford Dr. Gorham Maine 04038 Phone: 207.854.1700 Fax: 207.854.2287
 Email: sales@megaind.com Web: www.megaind.com